




ITALTOWER®
HEAVY DUTY LIGHTING TOWERS

Street Solar

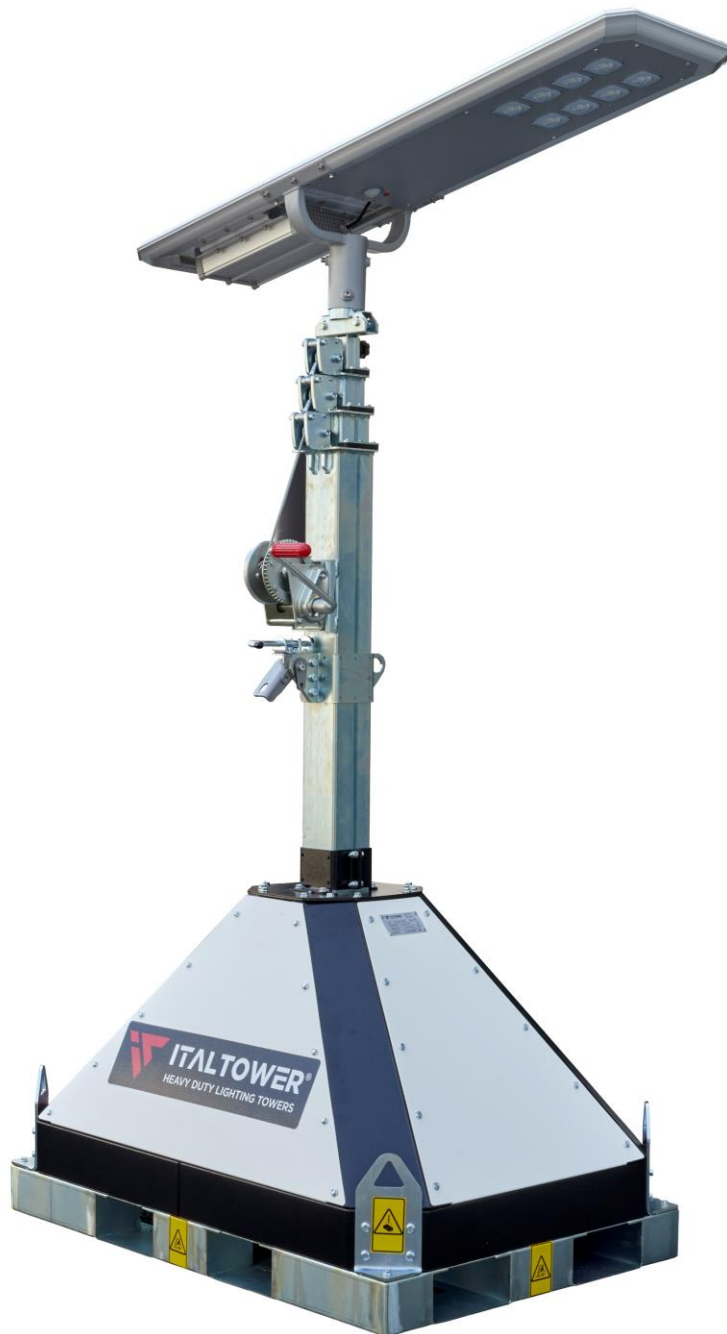

Picture for illustration purpose only.

Italtower Srl

Via Meucci 5-11, 35028

Piove di Sacco (PD) – Italy

VAT 04725890281

www.italtower.com

info@italtower.com



Floodlights

Type	LED (Osram)
Lumen	6000 lm
Colour Temp	5700K Ra 70+
Efficiency	190 lm/W
IP/IK Class	IP65 / IK10
Illuminated area	450 sqm

Batteries

Type	Li-ion
Capacity	14.8V / 2.6AH
Charging time	7 h
Battery status	Green: > 70% Orange: 30% - 70% Red: < 30%
Solar panel power	60 W

Galvanized mast

Height	5.5 m
Lifting mode	Manual
Maximum Wind speed	80 Km/h

Performance

Lighting Time in Rainyday	> 10 days
Control mode	On/Off button
Lighting mode	M1: dim 30% brightness + PIR 100% till dawn M2: 5 h of 100% brightness + 5 h of 25% dim brightness with PIR 100% brightness + 70% dim brightness till dawn M3: 70% constant brightness till dawn
Mode indication	M1: red light M2: green light M3: orange light
PIR	120° - > 5m
Distance between light towers	28m

Dimensions

Dimension min	1200x800x1860 mm
Dimension max	1200x1291x5500 mm
Weight	260 kg